


thin-wall tubing plugs, type K/SAE J-528 RP SERIES



Specifically designed to plug and protect Type K and SAE J-528 tubing. Tapered body provides snug friction fit for small diameter copper tubing. Flanged top sits flush with the outside diameter of tube to protect roundness and seal out contaminants.

Specifications

- Material: Low-Density Polyethylene
- Colour: Orange
- Applicable Spec: MIL-C-5501/8

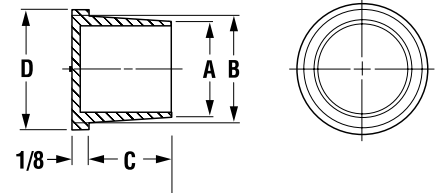

Part Number	Tubing O.D.	Dimensions								Standard Package	
		A		B		C		D		Pieces	Lbs.
		in	mm	in	mm	in	mm	in	mm		
RP 2	3/16	.105	2.67	.140	3.56	.250	6.35	.187	4.75	15000	4
RP 3	1/4	.165	4.19	.210	5.33	.375	9.53	.250	6.35	35000	15
RP 4	5/16	.225	5.72	.275	6.99	.375	9.53	.312	7.92	20000	13
RP 5	3/8	.290	7.37	.345	8.76	.500	12.70	.375	9.53	10000	12
RP 6	1/2	.410	10.41	.470	11.94	.375	9.53	.500	12.70	10000	12
RP 7	5/8	.530	13.46	.585	14.86	.562	14.27	.625	15.88	3500	9
RP 75	11/16	.550	13.97	.640	16.26	.500	12.70	.687	17.45	7500	20
RP 8	3/4	.665	16.89	.710	18.03	.562	14.27	.750	19.05	5000	14
RP 9	29/32	.734	18.64	.834	21.18	.625	15.88	.906	23.01	3500	17