


ROUND CAPS

Applications Include:

- Dust and Moisture Seals
- Masks during painting, plating, coating and shot blasting
- Covers for bolts and seals
- Thread Protectors
- Shipping Caps
- Insulators
- Pipe Caps
- Cable End Seals

Materials available:

- Standard
- High-Temperature
- Non-Staining for Copper Tubing
- Anti-Static
- Textured
- FDA Approved
- UL-Qualifiable

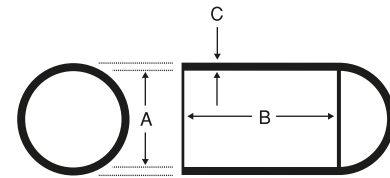

ROUND CAPS



Round Caps

A DIAMETER	B MAX LENGTH	A DIAMETER	B LENGTH
I N C H E S		M I L L I M E T E R S	
.062	.750	1.58	19.05
.070	1.000	1.78	25.41
.080	1.000	2.03	25.41
.093	1.000	2.36	25.41
.110	1.000	2.79	25.41
.125	1.500	3.18	38.11
.140	1.500	3.56	38.11
.148	1.500	3.76	38.11
.156	1.500	3.96	38.11
.172	1.500	4.37	38.11
.180	2.000	4.57	50.81
.187	2.000	4.75	50.81
.207	2.000	5.26	50.81
.221	2.000	5.62	50.81
.228	2.000	5.79	50.81
.234	2.000	5.95	50.81
.240	2.000	6.10	50.81
.250	2.000	6.35	50.81
.281	2.000	7.14	50.81
.300	2.000	7.62	50.81
.312	2.000	7.93	50.81
.343	2.000	8.71	50.81
.360	2.000	9.15	50.81
.375	2.000	9.53	50.81
.390	2.000	9.91	50.81
.405	2.000	10.29	50.81
.422	2.000	10.72	50.81
.437	2.000	11.10	50.81
.470	2.000	11.94	50.81
.485	2.000	12.32	50.81
.500	2.000	12.70	50.81
.531	2.000	13.49	50.81
.544	2.000	13.82	50.81
.562	2.000	14.28	50.81
.600	2.000	15.24	50.81
.610	2.000	15.50	50.81
.615	2.000	15.63	50.81
.625	2.000	15.88	50.81
.670	2.000	17.02	50.81
.687	2.000	17.45	50.81
.720	2.000	18.29	50.81
.735	2.000	18.67	50.81
.750	2.000	19.05	50.81

A DIAMETER	B MAX LENGTH	A DIAMETER	B MAX LENGTH
I N C H E S		M I L L I M E T E R S	
.812	2.000	20.63	50.81
.843	2.000	21.42	50.81
.855	2.000	21.72	50.81
.875	2.000	22.23	50.81
.905	2.000	22.99	50.81
.922	2.000	23.42	50.81
.937	2.000	23.81	50.81
.980	2.000	24.90	50.81
1.000	2.000	25.41	50.81
1.040	2.000	26.42	50.81
1.062	2.000	26.98	50.81
1.125	2.000	28.58	50.81
1.187	2.000	30.16	50.81
1.250	2.000	31.76	50.81
1.312	2.000	33.33	50.81
1.375	2.000	34.93	50.81
1.437	2.000	36.51	50.81
1.500	2.000	38.11	50.81
1.625	1.500	41.29	38.11
1.670	2.000	42.43	50.81
1.687	1.500	42.86	38.11
1.750	2.000	44.46	50.81
1.875	2.000	47.64	50.81
2.000	2.000	50.81	50.81
2.125	2.000	53.99	50.81
2.250	2.000	57.16	50.81
2.375	2.000	60.34	50.81
2.500	2.000	63.52	50.81
2.625	1.500	66.69	38.11
2.750	2.000	69.87	50.81
2.875	2.000	73.04	50.81
3.000	2.000	76.22	50.81
3.125	2.000	79.40	50.81
3.250	2.000	82.57	50.81
3.375	2.000	85.75	50.81
3.500	2.000	88.92	50.81
3.625	2.000	92.10	50.81
4.000	2.000	101.63	50.81
4.250	2.000	107.98	50.81
4.375	2.000	111.15	50.81
4.437	2.000	112.73	50.81
4.750	2.000	120.68	50.81
5.500	2.000	139.74	50.81

Wall thickness "C" is measured approximately 1/4" from the opened end, increasing slightly toward the closed end. Nominal wall is .050 ± .010".

*The Lengths listed above are maximum lengths.

Minimum length is 1/4". Lengths can be adjusted in 1/16" increments up to the maximum. Length is measured from the inside along the side wall, not to the center. Length tolerance is ± 1/16".

There are new sizes and styles of vinyl parts becoming available on a regular basis, please contact our Sales Department.